

WORKING RANGE DIAGRAM and TOTAL RATED LOAD TABLE

• WORKING RANGE DIAGRAM indicates unloaded condition, so does not include boom deflection.

MC-355HC

For Boom ①, Booms ① + ②

To be used in the standard stroke extension of outriggers.

Working radius (m)	2.0 or less	2.25	2.5	2.7	3.0	3.5	4.0	4.5	5.0	5.53
Rated load for crane main body	2900	2900	2900	2600	2300	1950	1650	1450	1250	1150
Rated load (kg)	2900	2900	2900	2600	2300	1950	1650	1370	1080	900

When extending boom ③, operate according to the performance for booms ① + ② + ③

For Booms ① + ② + ③

To be used in the standard stroke extension of outriggers.

Working radius (m)	2.0 or less	2.7	3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	7.73
Rated load for crane main body	2300	2300	2100	1700	1400	1200	1050	950	850	700	650
Rated load (kg)	2300	2300	2100	1700	1400	1200	1050	920	780	590	490

When extending boom ③, from boom ② more than half the length of the mark ③, operate according to the performance for booms ① + ② + ③ + ④

For Booms ① + ② + ③ + ④

To be used in the standard stroke extension of outriggers.




Working radius (m)	4.0 or less	4.5	5.0	5.5	6.0	7.0	8.0	9.0	9.93
Rated load for crane main body	1000	900	800	750	700	600	530	470	450
Rated load (kg)	1000	900	800	750	700	590	480	390	290

When extending boom ⑤, operate according to the performance for boom ⑤ shown in the next table

For Boom ⑤ extension

To be used in the standard stroke extension of outriggers.

Boom angle (°)	70 or more	65	60	50	40	30	20	10	3
Rated load for crane main body	600	500	400	300	250	220	200	200	200
Rated load (kg)	600	500	400	300	250	220	200	200	200

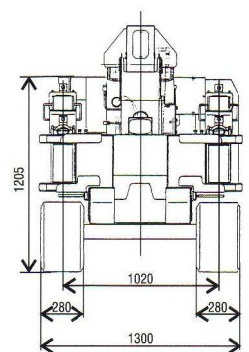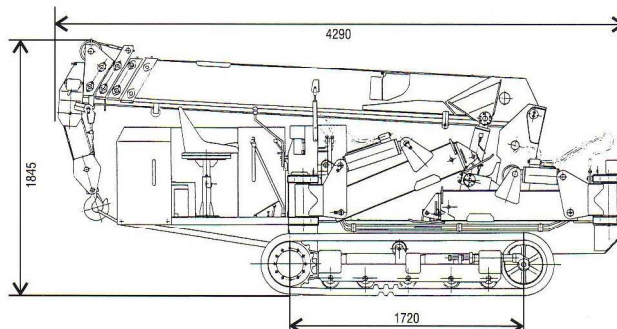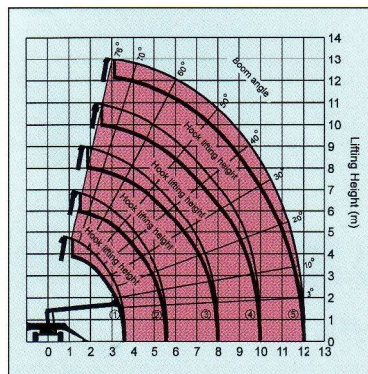

SPECIFICATIONS

PERFORMANCE	CRANE MODEL		MC-355HC
	CRANE CAPACITY		3.0 x 2.4m
	MAX. WORKING RADIUS		12.135m
	MAX. LIFTING HEIGHT		Approx. 11.8m
WINCH SYSTEM	TYPE		6 x Ws (26)
	WIRE ROPE		Ø8 x 73m
	No. OF TURNS OF ROPE		4 turns
	HOOK SPEED		11.5m / min
BOOM TELESCOPING SYSTEM	BOOM LENGTH		12.335m
	BOOM STAGES		4 Booms: Pentagon-type + 1 Boom Hexagonal-type
	TELESCOPING TYPE		Sequentially operating two cylinders + simultaneous wire rope operating + OMS type hydraulic extensions
	HYDRAULIC TELESCOPING STROKE		6.61m
BOOM ELEVATING SYSTEM	TIME FOR EXTENSION		28sec
	BOOM ELEVATING METHOD		Direct push type two double-acting cylinders
	BOOM ELEVATING ANGLE		3° - 76°
	TIME FOR BOOM ELEVATING		13 sec
SLEWING SYSTEM	SLEWING METHOD		Hydraulic motor
	SLEWING ANGLE		360° continuous
	SLEWING SPEED		2.8rpm
	OUTRIGGERS		Two step extension hydraulic cylinder push type

SAFETY DEVICES		Load meter, angle meter, automatic hydraulic lock, (pilot check), overwinding alarm (dry battery type equipped on boom top), hydraulic safety valve
ENGINE	TYPE	Water cooled diesel 3TNA 72L-UMS (YANMAR)
	OUTPUT	19ps/3000rpm
CRAWLING PERFORMANCE	GRADABILITY	30°
	SPEED	Forward 1.28km/h Reverse 1.28km/h
	DRIVING DEVICE	Hydraulic Motor
	BRAKE ANGLE	22°
STEERING SYSTEM	STEERING SYSTEM	RIGHT & LEFT INDEPENDENT CONTROL
	SIDE TURN STABILITY	35°
	CRAWLER	RUBBER CRAWLER
CRAWLING PRESSURE	CRAWLER WIDTH	280mm
	CRAWLER LENGTH	1720mm
	GROUND PRESSURE	31.4Kpa (0.32kg/cm ²)
	HYDRAULIC PUMP	Dual tandem gear pump
HYDRAULIC PUMP	RELIEF SET PRESSURE	20.6Mpa (210kg/cm ²) (for crawling), 19.1Mpa (195kg/cm ²) (for crane)
	HYDRAULIC OIL TANK	76L
GROSS WEIGHT		3120kg
TOTAL LENGTH		4290mm
TOTAL WIDTH		1300mm
TOTAL HEIGHT		1845mm
HYDRAULIC OIL TANK		36L